

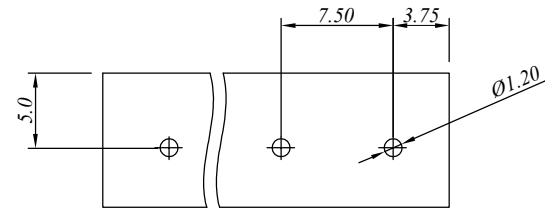


P.C.B. LAYOUT

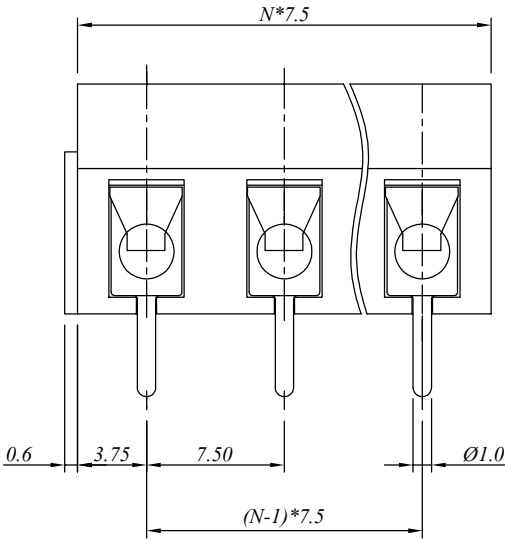

N=Number of contacts

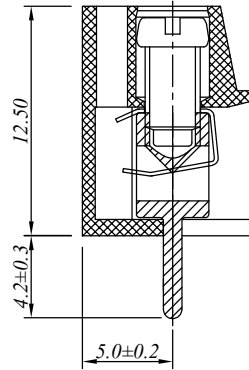

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/ Material

塑件/Insulator body:	PA66, UL94V-0
方针/Contact(metal housing):	Brass ,Tin planted
螺丝/Terminal screw:	M3, Steel Zn planted
弹片/Wire guard:	Stainless steel

电器性能/ Electrical

参考标准/Standard:	UL	IEC
额定电压/Rated voltage:	300V	250V
额定电流/Rated current:	16A	17.5A
接触电阻/Contact resistance:	20m Ω (max)	
绝缘电阻/Insulation resistance:	500M Ω /500V	
耐电压/Withstanding voltage:	AC 2000V/1Min	
使用线径/Wire range:	14-22AWG, 1.5mm ²	

机械性能/ Mechanical

扭矩/Torque:	0.5Nm(4.5Lb.in)
温度范围/Temperature range:	-40°C to +120°C
剥线长度/Steip length:	4-4.5mm
瞬间温度/Max soldering:	+250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch:	7.5mm
极数/Poles:	2-24P

慈溪万海电子有限公司 CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: JM300-7.50-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
				⊗	x. ±0.50
					x.x ±0.30
					x.xx ±0.10
					xx° ±1°
					UNITS: mm
					SCALE: 4/1
					REVISION:B3