

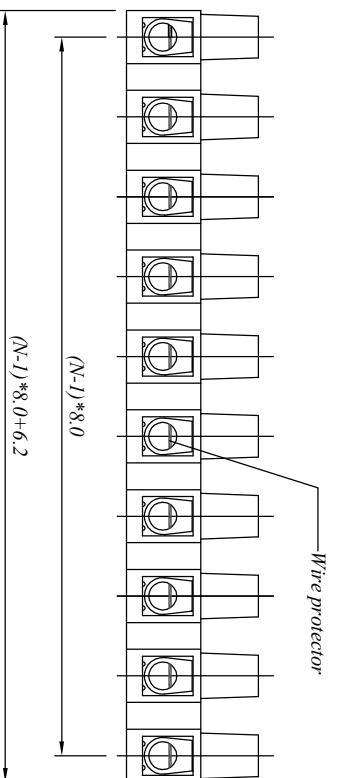


SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

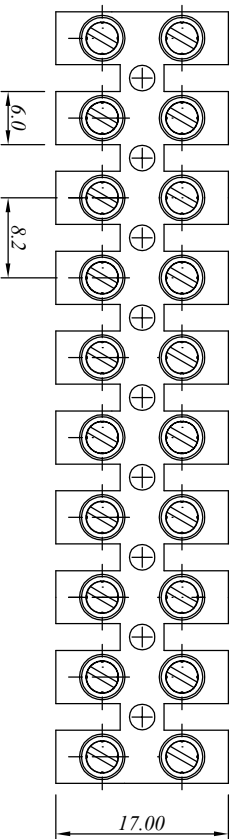


材质与电镀 / Material
 绝缘件 / Insulator body: P466, UL94V-0
 方块 / Contact (metal housing): Brass, Ni plated
 螺丝 / Terminal screw: M2.6, Steel Zn plated

电器性能 / Electrical
 额定电压 / Rated voltage: 450V
 额定电流 / Rated current: 17.5A
 耐压 / Withstanding voltage: AC 2500V/1Min
 使用线径 / Wire range: 14-20AWG, 1.5mm²

机械性能 / Mechanical
 扭矩 / Torque: 0.4Nm (3.6lb.in)
 温度范围 / Temperature range: -40°C to +120°C
 铜线长度 / Strip length: 5mm

尺寸 / Dimensions
 间距 / Pitch: 8.0mm
 极数 / Poles: 2-12P

N = Number of contacts

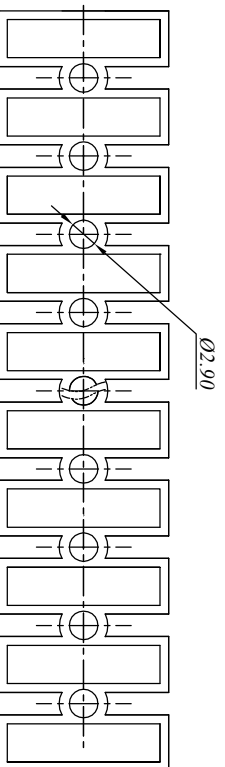

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: P48HWP

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DR4W/ BY

CUSTOM NO.:

Tolerance

UNITS: mm

±0.50

SCALE: 4/1

x.x ±0.30

REVISION: B3

x.xx ±0.10

xx° ±1°