

1

2

3

4


5

6


7

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			


E

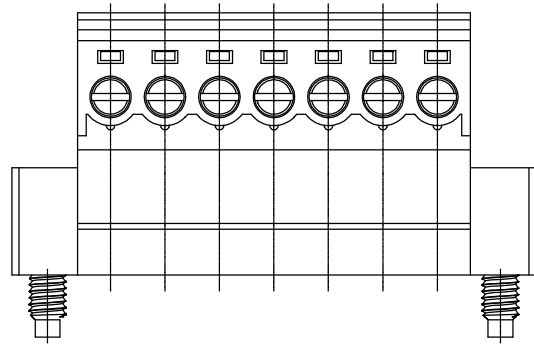


D

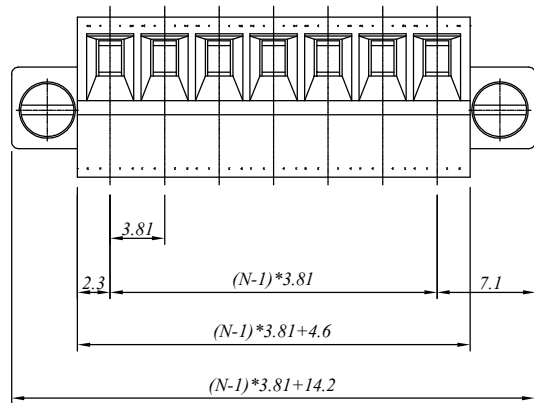

C

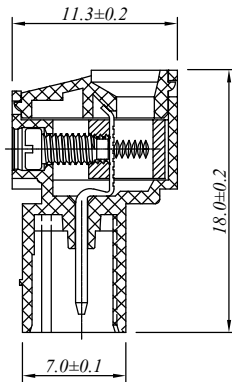

B

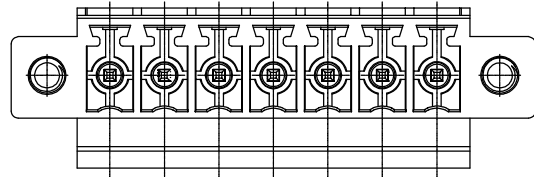

A

N=Number of contacts

材质于电镀/Material

塑件/Insulator body: PA66, UL94V-0  
 方块/Contact(metal housing): Brass ,Ni plated  
 螺丝/Terminal screw: M2.0, Steel Zn plated  
 夹子/Clamp: Phosphor bronze, Ni plated

电器性能/Electrical

参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 250V  
 额定电流/Rated current: 8A 10A  
 接触电阻/Contact resistance: 20mΩ (max)  
 绝缘电阻/Insulation resistance: 500MΩ /500V  
 耐电压/Withstanding voltage: AC 2000V/1Min  
 使用线径/Wire range: 16-28AWG, 1.5mm<sup>2</sup>

机械性能/Mechanical

扭矩/Torque: 0.2Nm(1.7Lb.in)  
 温度范围/Temperature range: -40°C to +105°C  
 剥线长度/Steip length: 6-7mm  
 瞬间温度/Max soldering: +250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch: 3.81mm  
 极数/Poles: 2-24P

慈溪万海电子有限公司  
**CIXI WANHAI ELECTRONICS CO., LTD.**

PART. NAME: 15EDGKRM-3.81-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°
				UNITS:mm	
				SCALE:1.9/1 REVISION:5	