
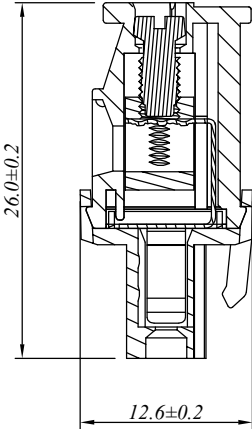

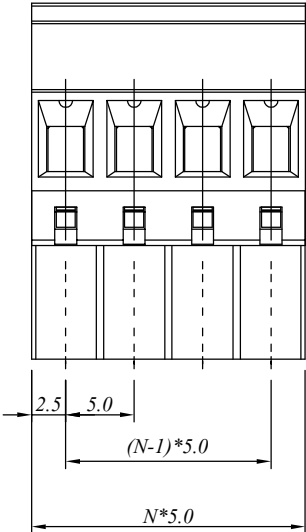


	1	2	3	4	5	6	7		
E						SIGN	DATE	DESCRIPTION	APPROVER
						△			
						△			
D						△			
C									
B									
A									



N=Number of contacts

材质于电镀/*Material*

塑件/*Insulator body*: PA66, UL94V-0

方块/*Contact(metal housing)*: Brass ,Ni planted

螺丝/*Terminal screw*: M3.0, Steel Zn planted

夹子/*Clamp*: Phosphor bronze, Ni planted

电器性能/*Electrical*

参考标准/*Standard*: UL IEC

额定电压/*Rated voltage*: 300V 450V

额定电流/*Rated current*: 15A 20A

接触电阻/*Contact resistance*: 20m Ω (max)

绝缘电阻/*Insulation resistance*: 500M Ω /500V

耐电压/*Withstanding voltage*: AC 2000V/1Min

使用线径/*Wire range*: 14-28AWG, 2.5mm²

机械性能/*Mechanical*

扭矩/*Torque*: 0.5Nm(4.5Lb.in)

温度范围/*Temperature range*: -40°C to +105°C

剥线长度/*Steip length*: 7-8mm

瞬间温度/*Max soldering*: +250°C, for 5 Sec

尺寸/*Dimensions*

间距/*Pitch*: 5.0mm

极数/*Poles*: 2-24P





慈溪万海电子有限公司

CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGKB-5.0-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°



UNITS:mm
SCALE:1.9/1
REVISIONB5

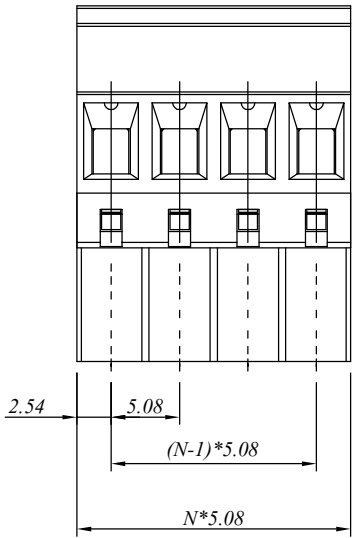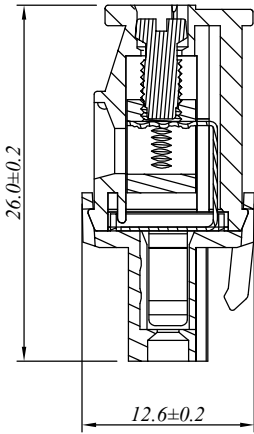	1	2	3	4	5	6	7																																			
						SIGN	DATE	DESCRIPTION	APPROVER																																	
						△																																				
						△																																				
						△																																				
E						材质于电镀/ <i>Material</i> 塑件/ <i>Insulator body</i>: PA66, UL94V-0 方块/ <i>Contact(metal housing)</i>: Brass ,Ni planted 螺丝/ <i>Terminal screw</i>: M3.0, Steel Zn planted 夹子/ <i>Clamp</i>: Phosphor bronze, Ni planted 电器性能/ <i>Electrical</i> 参考标准/ <i>Standard</i>: UL IEC 额定电压/ <i>Rated voltage</i>: 300V 450V 额定电流/ <i>Rated current</i>: 15A 20A 接触电阻/ <i>Contact resistance</i>: 20m Ω (max) 绝缘电阻/ <i>Insulation resistance</i>: 500M Ω /500V 耐电压/ <i>Withstanding voltage</i>: AC 2000V/1Min 使用线径/ <i>Wire range</i>: 14-28AWG, 2.5mm² 机械性能/ <i>Mechanical</i> 扭矩/ <i>Torque</i>: 0.5Nm(4.5Lb.in) 温度范围/ <i>Temperature range</i>: -40°C to +105°C 剥线长度/ <i>Steip length</i>: 7-8mm 瞬间温度/ <i>Max soldering</i>: +250°C, for 5 Sec 尺寸/ <i>Dimensions</i> 间距/ <i>Pitch</i>: 5.08mm 极数/ <i>Poles</i>: 2-24P																																				
D																																										
C																																										
B																																										
A	N=Number of contacts					慈溪万海电子有限公司 CIXI WANHAI ELECTRONICS CO., LTD. <table><tr><td colspan="4">PART. NAME: 2EDGKB-5.08-XXP</td><td colspan="2">TITLE:</td></tr><tr><td colspan="4">PART. NO.:</td><td colspan="2">DWG NAME:</td></tr><tr><td>APPROVED BY</td><td>CHECKED BY</td><td>DESIGNED BY</td><td>DRAWN BY</td><td>CUSTOM NO.:</td><td rowspan="4">Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>				PART. NAME: 2EDGKB-5.08-XXP				TITLE:		PART. NO.:				DWG NAME:		APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°															
PART. NAME: 2EDGKB-5.08-XXP				TITLE:																																						
PART. NO.:				DWG NAME:																																						
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°																																					