
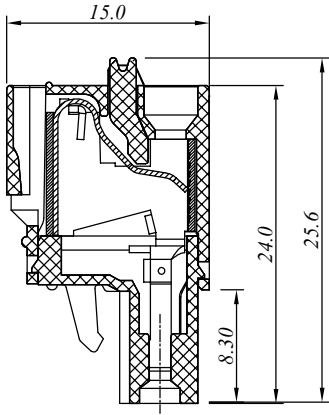
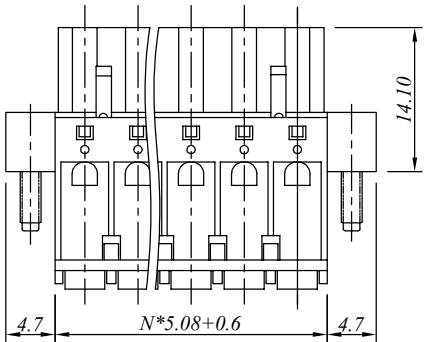


SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

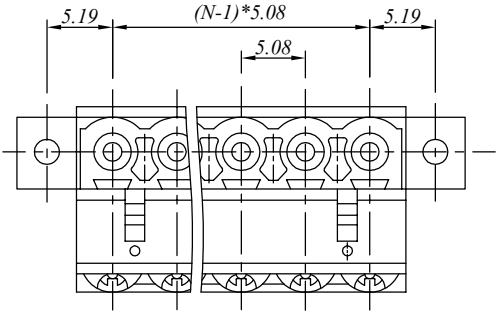

N=Number of contacts

材质于电镀/ *Material*

塑件/ *Insulator body:*

弹片/ *Shrapnel:*

夹子/ *Clamp:*

PA66, UL94V-0

Stainless steel

Phosphor bronze, Ni planted

电器性能/ *Electrical*

参考标准/ *Standard:*

额定电压/ *Rated voltage:*

额定电流/ *Rated current:*

接触电阻/ *Contact resistance:*

绝缘电阻/ *Insulation resistance:*

耐电压/ *Withstanding voltage:*

使用线径/ *Wire range:*

UL

IEC

300V

450V

10A

20A

20m Ω (max)

500M Ω /500V

AC 2000V/1Min

14-28AWG, 2.5mm²

机械性能/ *Mechanical*

温度范围/ *Temperature range:*

剥线长度/ *Steip length:*

-40°C to +105°C

7-8mm

尺寸/ *Dimensions*

间距/ *Pitch:*

极数/ *Poles:*

5.08mm

2-24P

慈溪万海电子有限公司

CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGKDM-5.08-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					X ±0.50
					X.X ±0.30
					X.XX ±0.10
				UNITS:mm	XX° ±1°
				SCALE:1.9/1	
				REVISIONB5	