

1

2

3





4

5

6

7

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

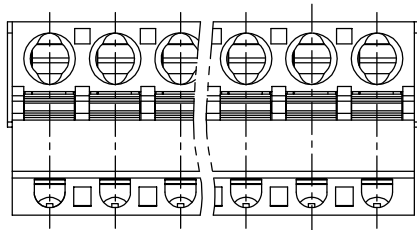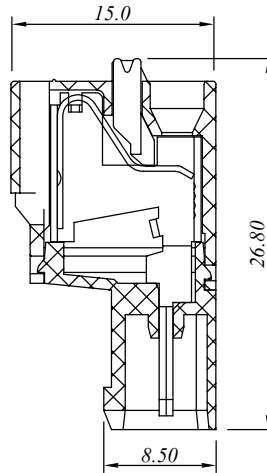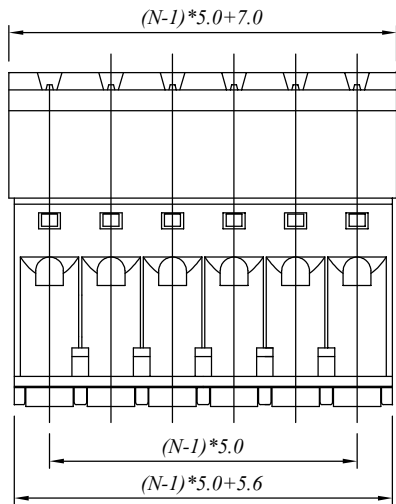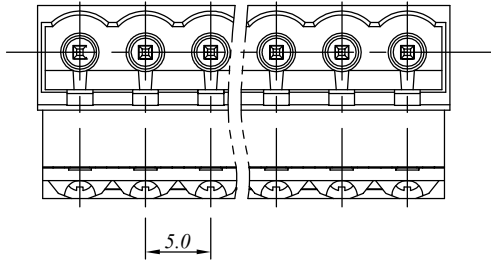

N=Number of contacts

材质于电镀/ Material

塑件/Insulator body:

PA66, UL94V-0

弹片/Shrapnel:

Stainless steel

夹子/Clamp:

Phosphor bronze, Ni planted

电器性能/ Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 450V

额定电流/Rated current:

10A 20A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

使用线径/Wire range:

14-28AWG, 2.5mm<sup>2</sup>

机械性能/ Mechanical

温度范围/Temperature range:

-40°C to +105°C

剥线长度/Steip length:

7-8mm

尺寸/Dimensions

间距/Pitch:

5.0mm

极数/Poles:

2-24P

慈溪万海电子有限公司  
**CIXI WANHAI ELECTRONICS CO., LTD.**

PART. NAME: 2EDGKDR-5.0-XXP

TITLE:

PART. NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance

X ±0.50

X.X ±0.30

X.XX ±0.10

XX° ±1°

UNITS:mm

SCALE:1.9/1

REVISIONB5



1

2

3





4

5

6

7

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

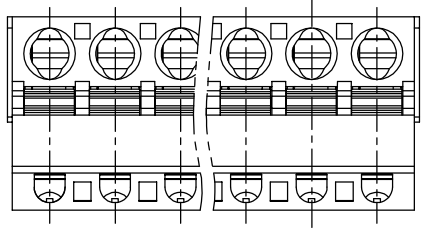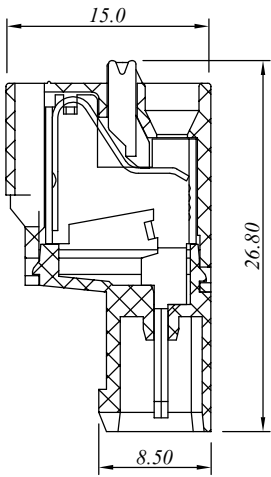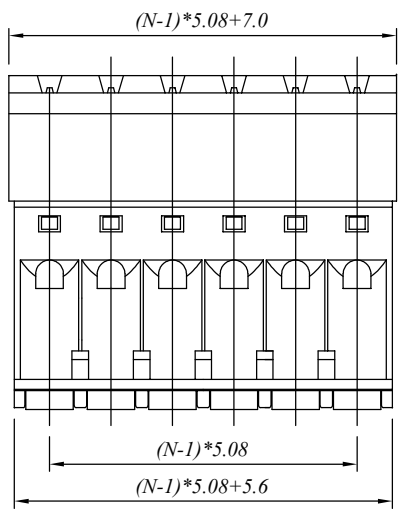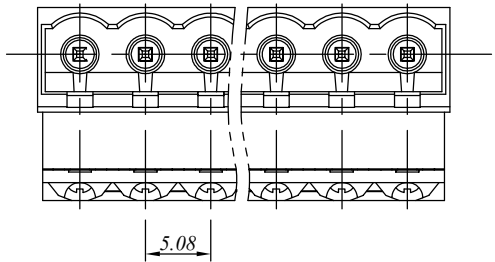

*N=Number of contacts*

**材质于电镀/ Material**

塑件/Insulator body: PA66, UL94V-0  
 弹片/Shrapnel: Stainless steel  
 夹子/Clamp: Phosphor bronze, Ni planted

**电器性能/ Electrical**

参考标准/Standard: UL IEC  
 额定电压/Rated voltage: 300V 450V  
 额定电流/Rated current: 10A 20A  
 接触电阻/Contact resistance: 20m Ω (max)  
 绝缘电阻/Insulation resistance: 500M Ω /500V  
 耐电压/Withstanding voltage: AC 2000V/1Min  
 使用线径/Wire range: 14-28AWG, 2.5mm<sup>2</sup>

**机械性能/ Mechanical**

温度范围/Temperature range: -40°C to +105°C  
 剥线长度/Steip length: 7-8mm

**尺寸/Dimensions**

间距/Pitch: 5.08mm  
 极数/Poles: 2-24P

**慈溪万海电子有限公司**  
**CIXI WANHAI ELECTRONICS CO., LTD.**

PART. NAME: 2EDGKDR-5.08-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°
				UNITS:mm	
				SCALE:1.9/1 REVISION:5	

