
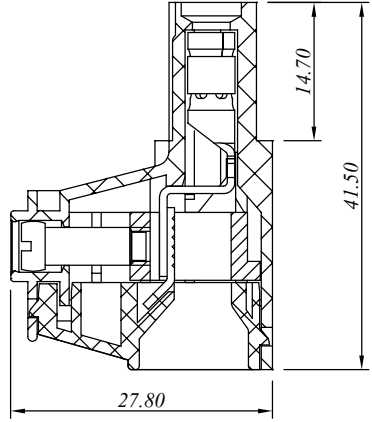
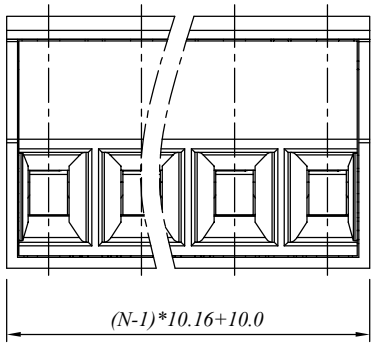


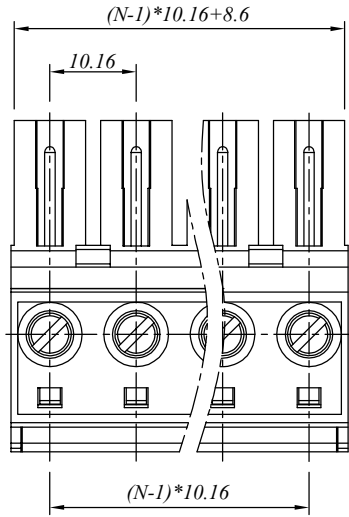

N=Number of contacts

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/ *Material*

塑件/ <i>Insulator body:</i>	PA66, UL94V-0
方块/ <i>Contact(metal housing):</i>	Brass ,Ni planted
螺丝/ <i>Terminal screw:</i>	M4.0, Steel Zn planted
夹子/ <i>Clamp:</i>	Phosphor bronze, Ni planted

电器性能/ *Electrical*

参考标准/ <i>Standard:</i>	UL	IEC
额定电压/ <i>Rated voltage:</i>	600V	1000V
额定电流/ <i>Rated current:</i>	65A	57A
接触电阻/ <i>Contact resistance:</i>	20m Ω (max)	
绝缘电阻/ <i>Insulation resistance:</i>	500M Ω /500V	
耐电压/ <i>Withstanding voltage:</i>	AC 3500V/1Min	
使用线径/ <i>Wire range:</i>	6-20AWG, 10mm ²	

机械性能/ *Mechanical*

扭矩/ <i>Torque:</i>	1.2Nm(10.5Lb.in)
温度范围/ <i>Temperature range:</i>	-40°C to +105°C
剥线长度/ <i>Steip length:</i>	12-13mm
瞬间温度/ <i>Max soldering:</i>	+250°C, for 5 Sec

尺寸/ *Dimensions*

间距/ <i>Pitch:</i>	10.16mm
极数/ <i>Poles:</i>	2-12P

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 5EDGK-10.16-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 XX° ±1°
				UNITS:mm	
				SCALE:1.9/1	
				REVISIONB5	