

1

2

3

4




5

6

7

SIGN	DATE	DESCRIPTION	APPROVER
▲			
▲			
▲			

# P.C.B. LAYOUT

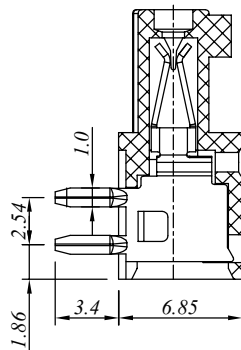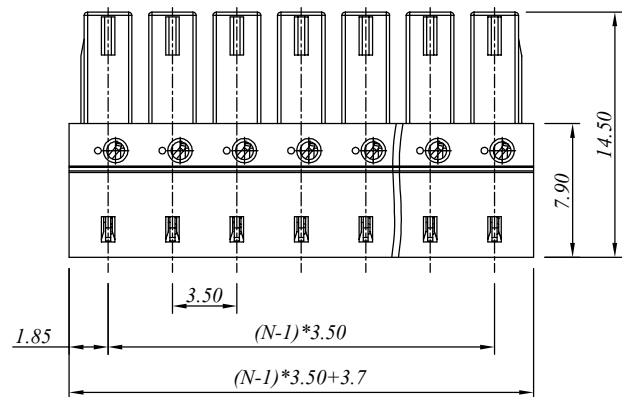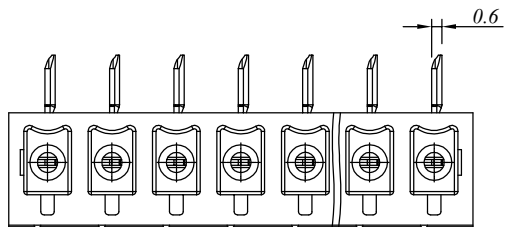

## 材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Phosphor bronze, Tin plated

## 电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 250V

额定电流/Rated current:

8A 10A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

## 机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec


## 尺寸/Dimensions

间距/Pitch:

3.50mm

极数/Poles:

2-24P

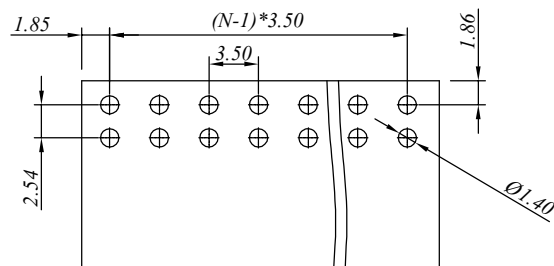

N= Number of concats

## 慈溪万海电子有限公司 CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 15EDGA-3.50-XXP

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance  
X ±0.50  
X.X ±0.30  
X.XX ±0.10  
X° ±1°



UNITS:mm

SCALE:4/1

REVISION:1

1

2

3

4





5

6

7

SIGN	DATE	DESCRIPTION	APPROVER
▲			
▲			
▲			

# P.C.B. LAYOUT

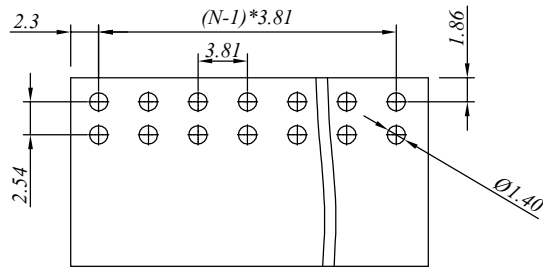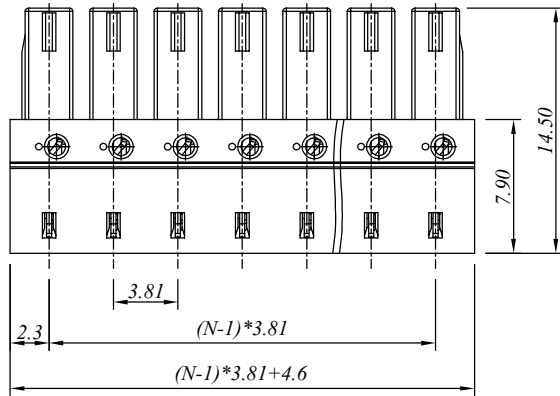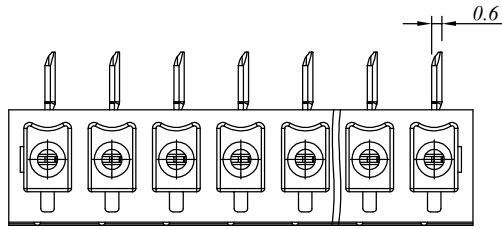

*N = Number of concats*

### 材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Phosphor bronze ,Tin plated

### 电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 250V

额定电流/Rated current:

8A 10A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

### 机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

### 尺寸/Dimensions

间距/Pitch:

3.81mm

极数/Poles:

2-24P

## 慈溪万海电子有限公司 CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 15EDGA-3.81-XXP

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance

X ±0.50

X.X ±0.30

X.XX ±0.10

X° ±1°



UNITS:mm

SCALE:1/1

REVISION:1