


SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

E

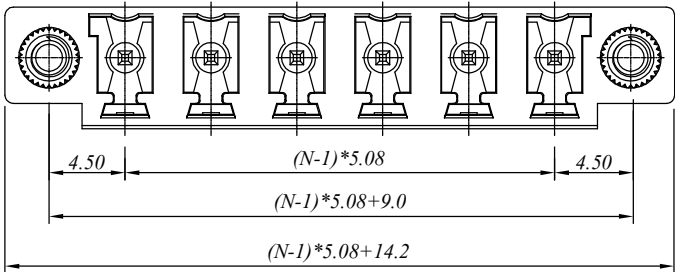

P.C.B. LAYOUT

材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Brass ,Tin planted

电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 250V

额定电流/Rated current:

8A 10A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions



间距/Pitch:

5.08mm

极数/Poles:

2-24P


D

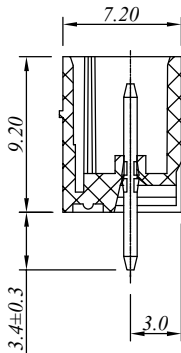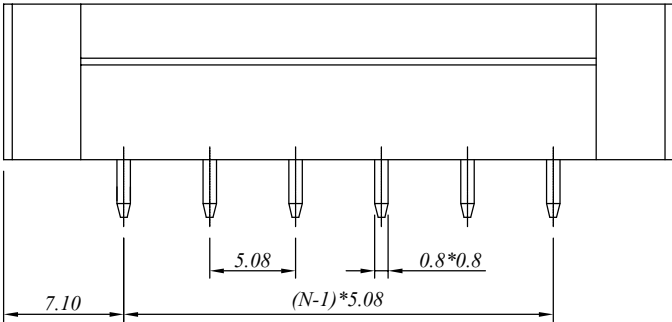

C

B

N=Number of contacts

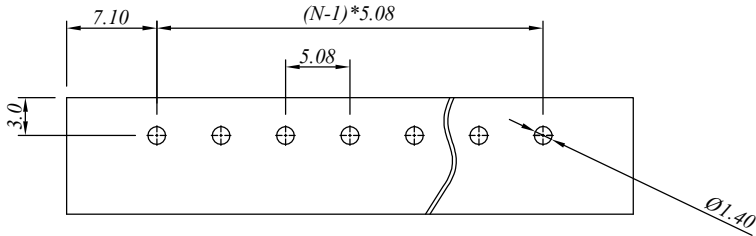

A

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 15EDGVM-5.08-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					x. ± 0.50
					x.x ± 0.30
					x.xx ± 0.10
					xx° $\pm 1^\circ$