


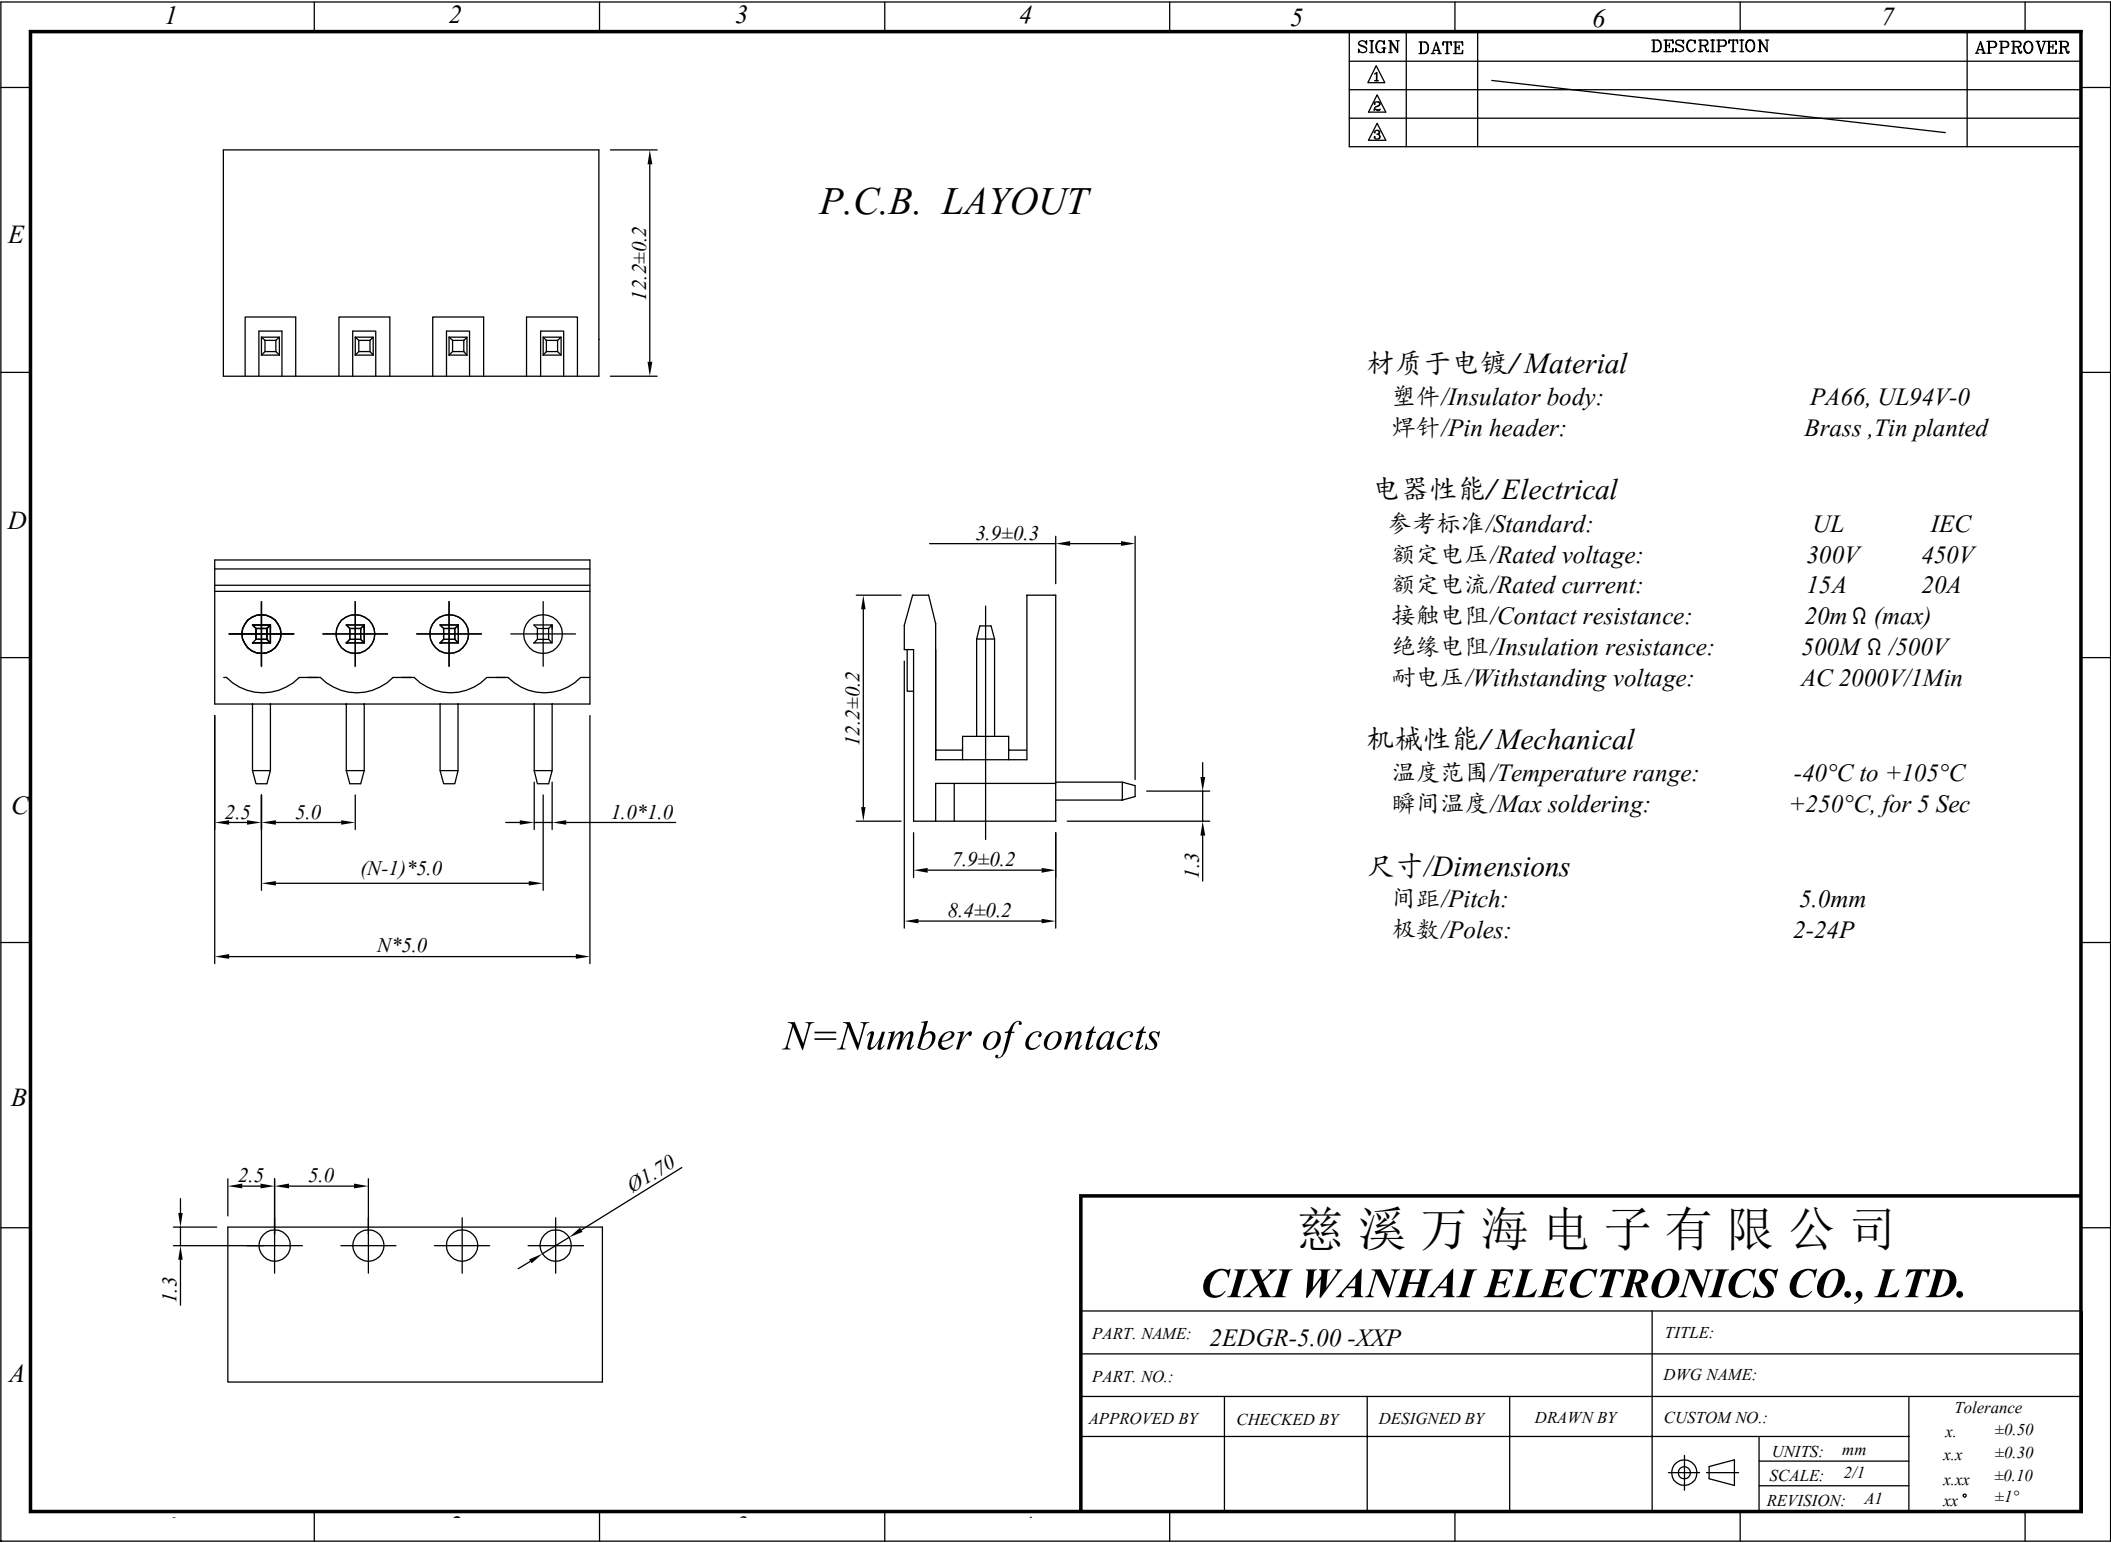

P.C.B. LAYOUT

N=Number of contacts

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/ *Material*

塑件/ *Insulator body*: PA66, UL94V-0
焊针/ *Pin header*: Brass ,Tin planted

电器性能/ *Electrical*

参考标准/ *Standard*: UL IEC
额定电压/ *Rated voltage*: 300V 450V
额定电流/ *Rated current*: 15A 20A
接触电阻/ *Contact resistance*: 20m Ω (max)
绝缘电阻/ *Insulation resistance*: 500M Ω /500V
耐电压/ *Withstanding voltage*: AC 2000V/1Min

机械性能/ *Mechanical*

温度范围/ *Temperature range*: -40°C to +105°C
瞬间温度/ *Max soldering*: +250°C, for 5 Sec

尺寸/ *Dimensions*




间距/ *Pitch*: 5.0mm
极数/ *Poles*: 2-24P

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGR-5.00 -XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					x. ±0.50
					x.x ±0.30
					x.xx ±0.10
				REVISION: A1	xx° ±1°

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

P.C.B. LAYOUT

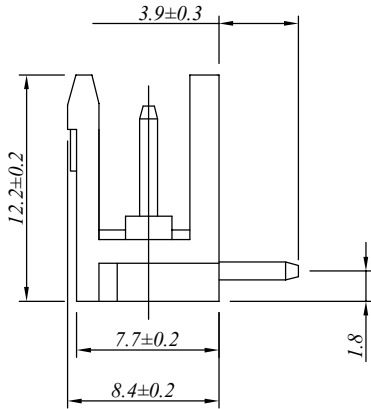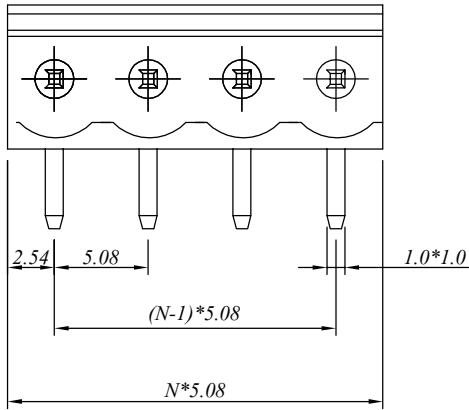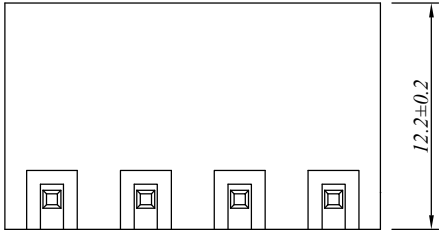


材质于电镀/*Material*
塑件/*Insulator body*: PA66, UL94V-0
焊针/*Pin header*: Brass ,Tin planted

电器性能/*Electrical*
参考标准/*Standard*: UL IEC
额定电压/*Rated voltage*: 300V 450V
额定电流/*Rated current*: 15A 20A
接触电阻/*Contact resistance*: 20m Ω (max)
绝缘电阻/*Insulation resistance*: 500M Ω /500V
耐电压/*Withstanding voltage*: AC 2000V/1Min

机械性能/*Mechanical*
温度范围/*Temperature range*: -40℃ to +105℃
瞬间温度/*Max soldering*: +250℃, for 5 Sec

尺寸/*Dimensions*
间距/*Pitch*: 5.08mm
极数/*Poles*: 2-24P

N=Number of contacts

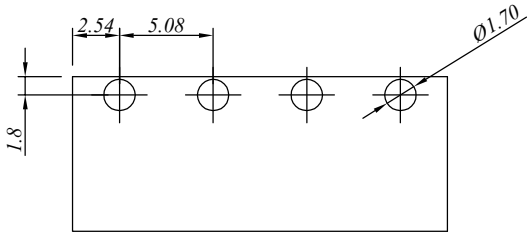

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGR-5.08 -XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					x. ±0.50
					x.x ±0.30
					x.xx ±0.10
				REVISION: A1	xx° ±1°