

1

2

3

4





5

6

7

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

P.C.B. LAYOUT

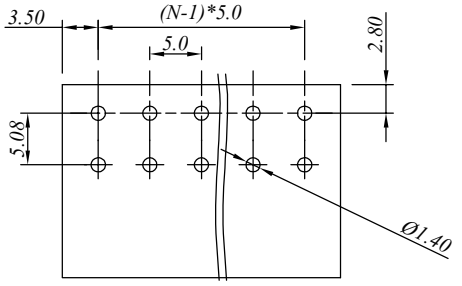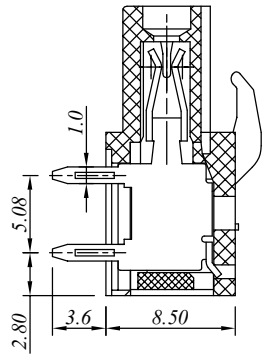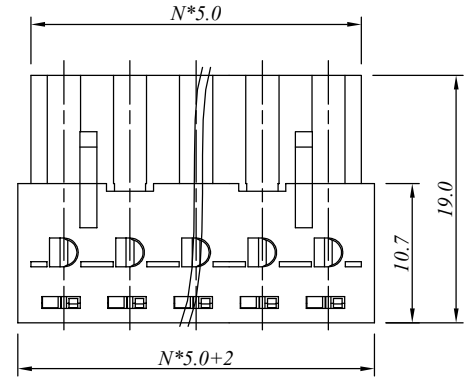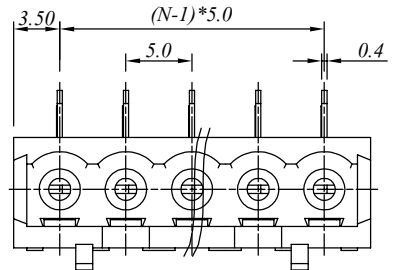

N= Number of concats

材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Phosphor bronze ,Tin plated

电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 450V

额定电流/Rated current:

15A 17.5A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch:

5.0mm

极数/Poles:

2-24P

慈溪万海电子有限公司

CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGA-5.0-XXP				TITLE:	
PART NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
				UNITS:mm SCALE:1/1 REVISION:1	

1

2

3

4





5

6

7

SIGN	DATE	DESCRIPTION	APPROVER
▲			
▲			
▲			

P.C.B. LAYOUT

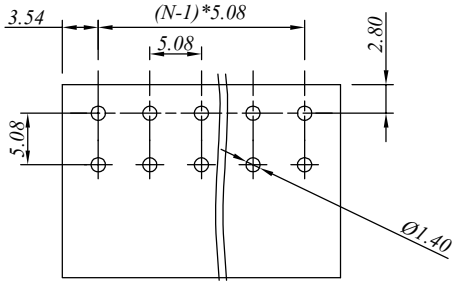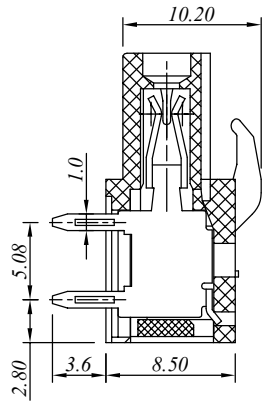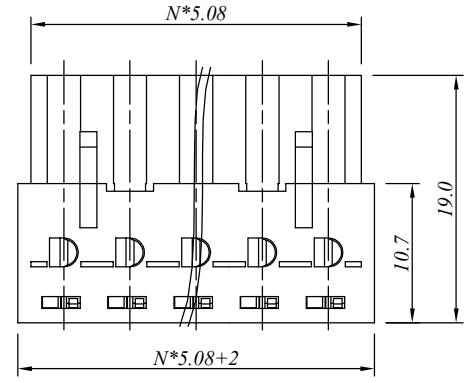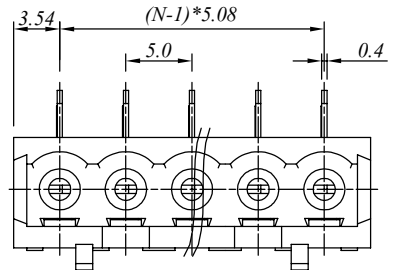

N= Number of concats

材质于电镀/Material

塑件/Insulator body:
焊针/Pin header:

PA66, UL94V-0
Phosphor bronze ,Tin plated

电器性能/Electrical

参考标准/Standard:
额定电压/Rated voltage:
额定电流/Rated current:
接触电阻/Contact resistance:
绝缘电阻/Insulation resistance:
耐电压/Withstanding voltage:

UL IEC
300V 450V
15A 17.5A
20m Ω (max)
500M Ω /500V
AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:
瞬间温度/Max soldering:

-40°C to +105°C
+250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch:
极数/Poles:

5.08mm
2-24P

慈溪万海电子有限公司 CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGA-5.08-XXP				TITLE:	
PART NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
				UNITS:mm SCALE:4/1 REVISION:1	