


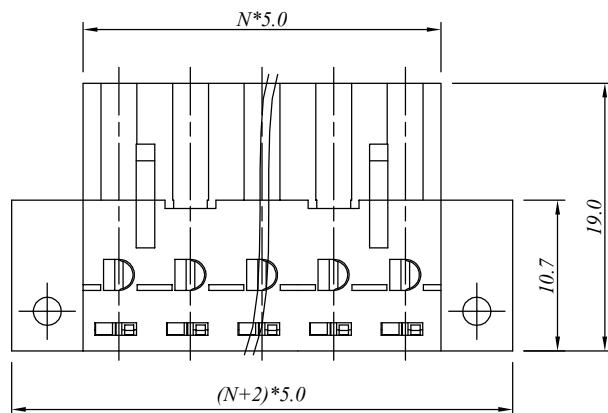


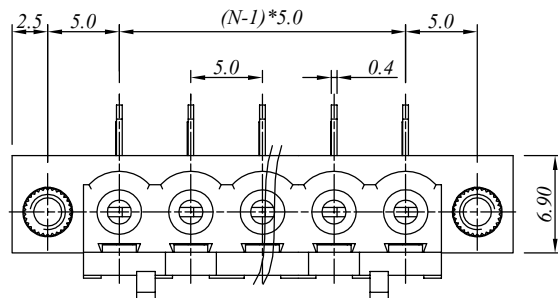

P.C.B. LAYOUT

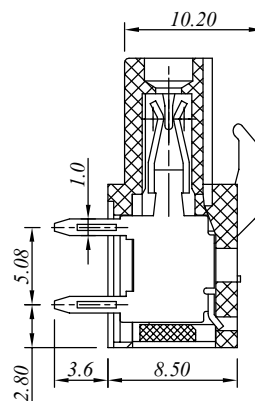

$N = \text{Number of concats}$

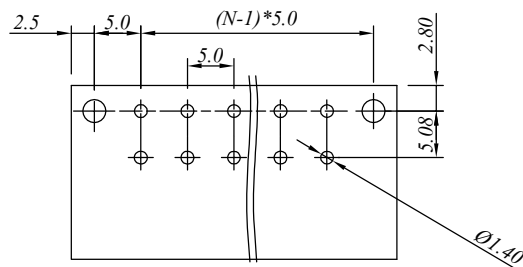

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Phosphor bronze ,Tin planted

电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 450V

额定电流/Rated current:

15A 17.5A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch:

5.0mm

极数/Poles:

2-24P

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGAM-5.0-XXP

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance

X ± 0.50

X.X ± 0.30

X.XX ± 0.10

X° $\pm 1^\circ$



UNITS:mm

SCALE:4/1

REVISION:1

E

D

C

B

A

1

2

3


4

5



6

7

SIGN	DATE	DESCRIPTION	APPROVER

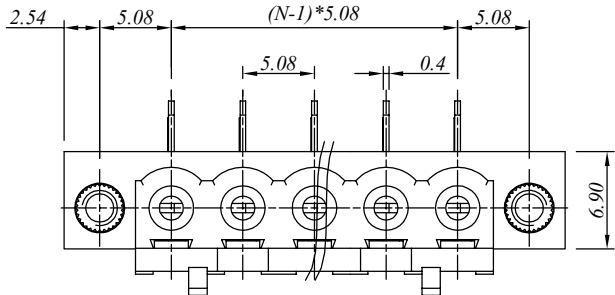

P.C.B. LAYOUT

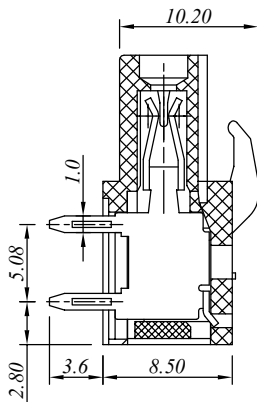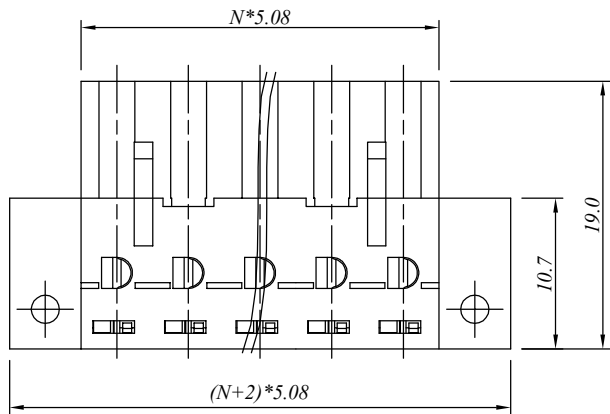

材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Phosphor bronze ,Tin planted

电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 450V

额定电流/Rated current:

15A 17.5A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions


间距/Pitch:

5.08mm

极数/Poles:

2-24P

N= Number of concats

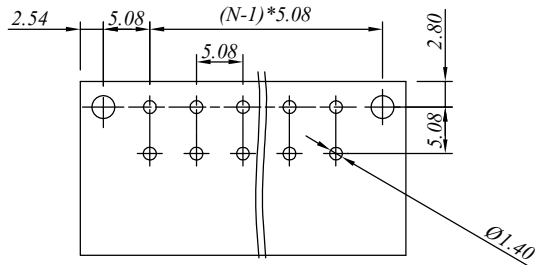

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGAM-5.08-XXP

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance

X ± 0.50

X.X ± 0.30

X.XX ± 0.10

X° $\pm 1^\circ$



UNITS:mm

SCALE:4/1

REVISION:1