


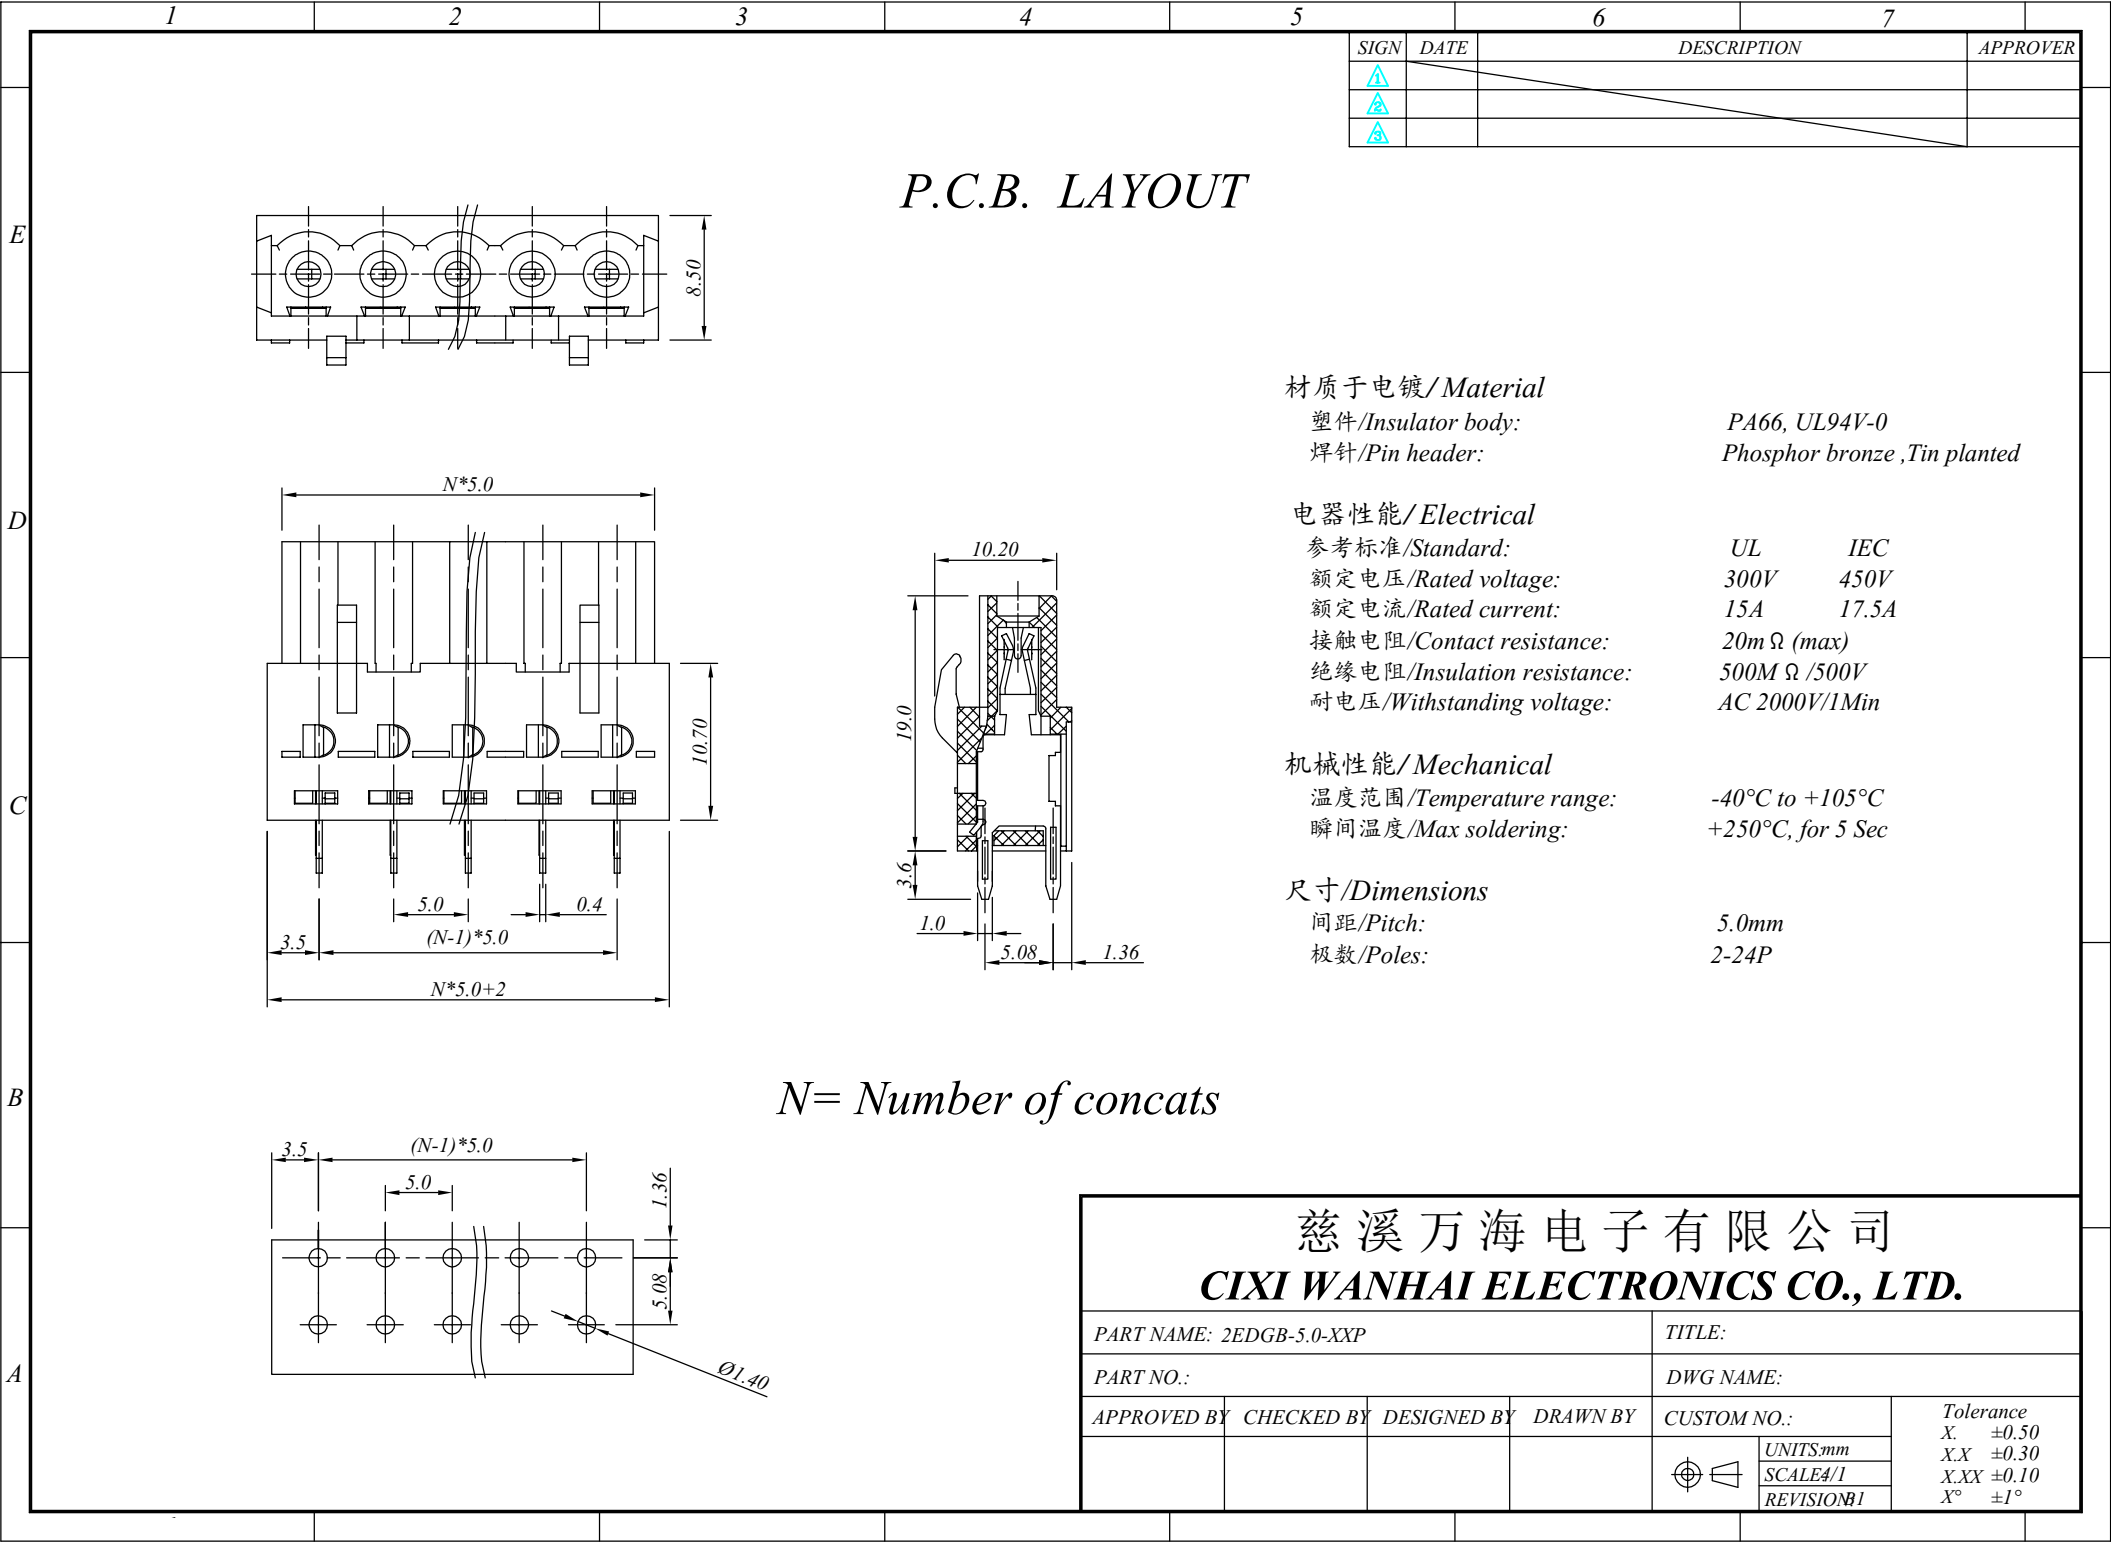

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER

材质于电镀/Material
塑件/Insulator body: PA66, UL94V-0
焊针/Pin header: Phosphor bronze ,Tin planted

电器性能/Electrical
参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 450V
额定电流/Rated current: 15A 17.5A
接触电阻/Contact resistance: 20m Ω (max)
绝缘电阻/Insulation resistance: 500M Ω /500V
耐电压/Withstanding voltage: AC 2000V/1Min


机械性能/Mechanical
温度范围/Temperature range: -40°C to +105°C
瞬间温度/Max soldering: +250°C, for 5 Sec

尺寸/Dimensions
间距/Pitch: 5.0mm
极数/Poles: 2-24P

N= Number of concats

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGB-5.0-XXP				TITLE:	
PART NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					X ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
					UNITSmm
					SCALE4/1
					REVISION1

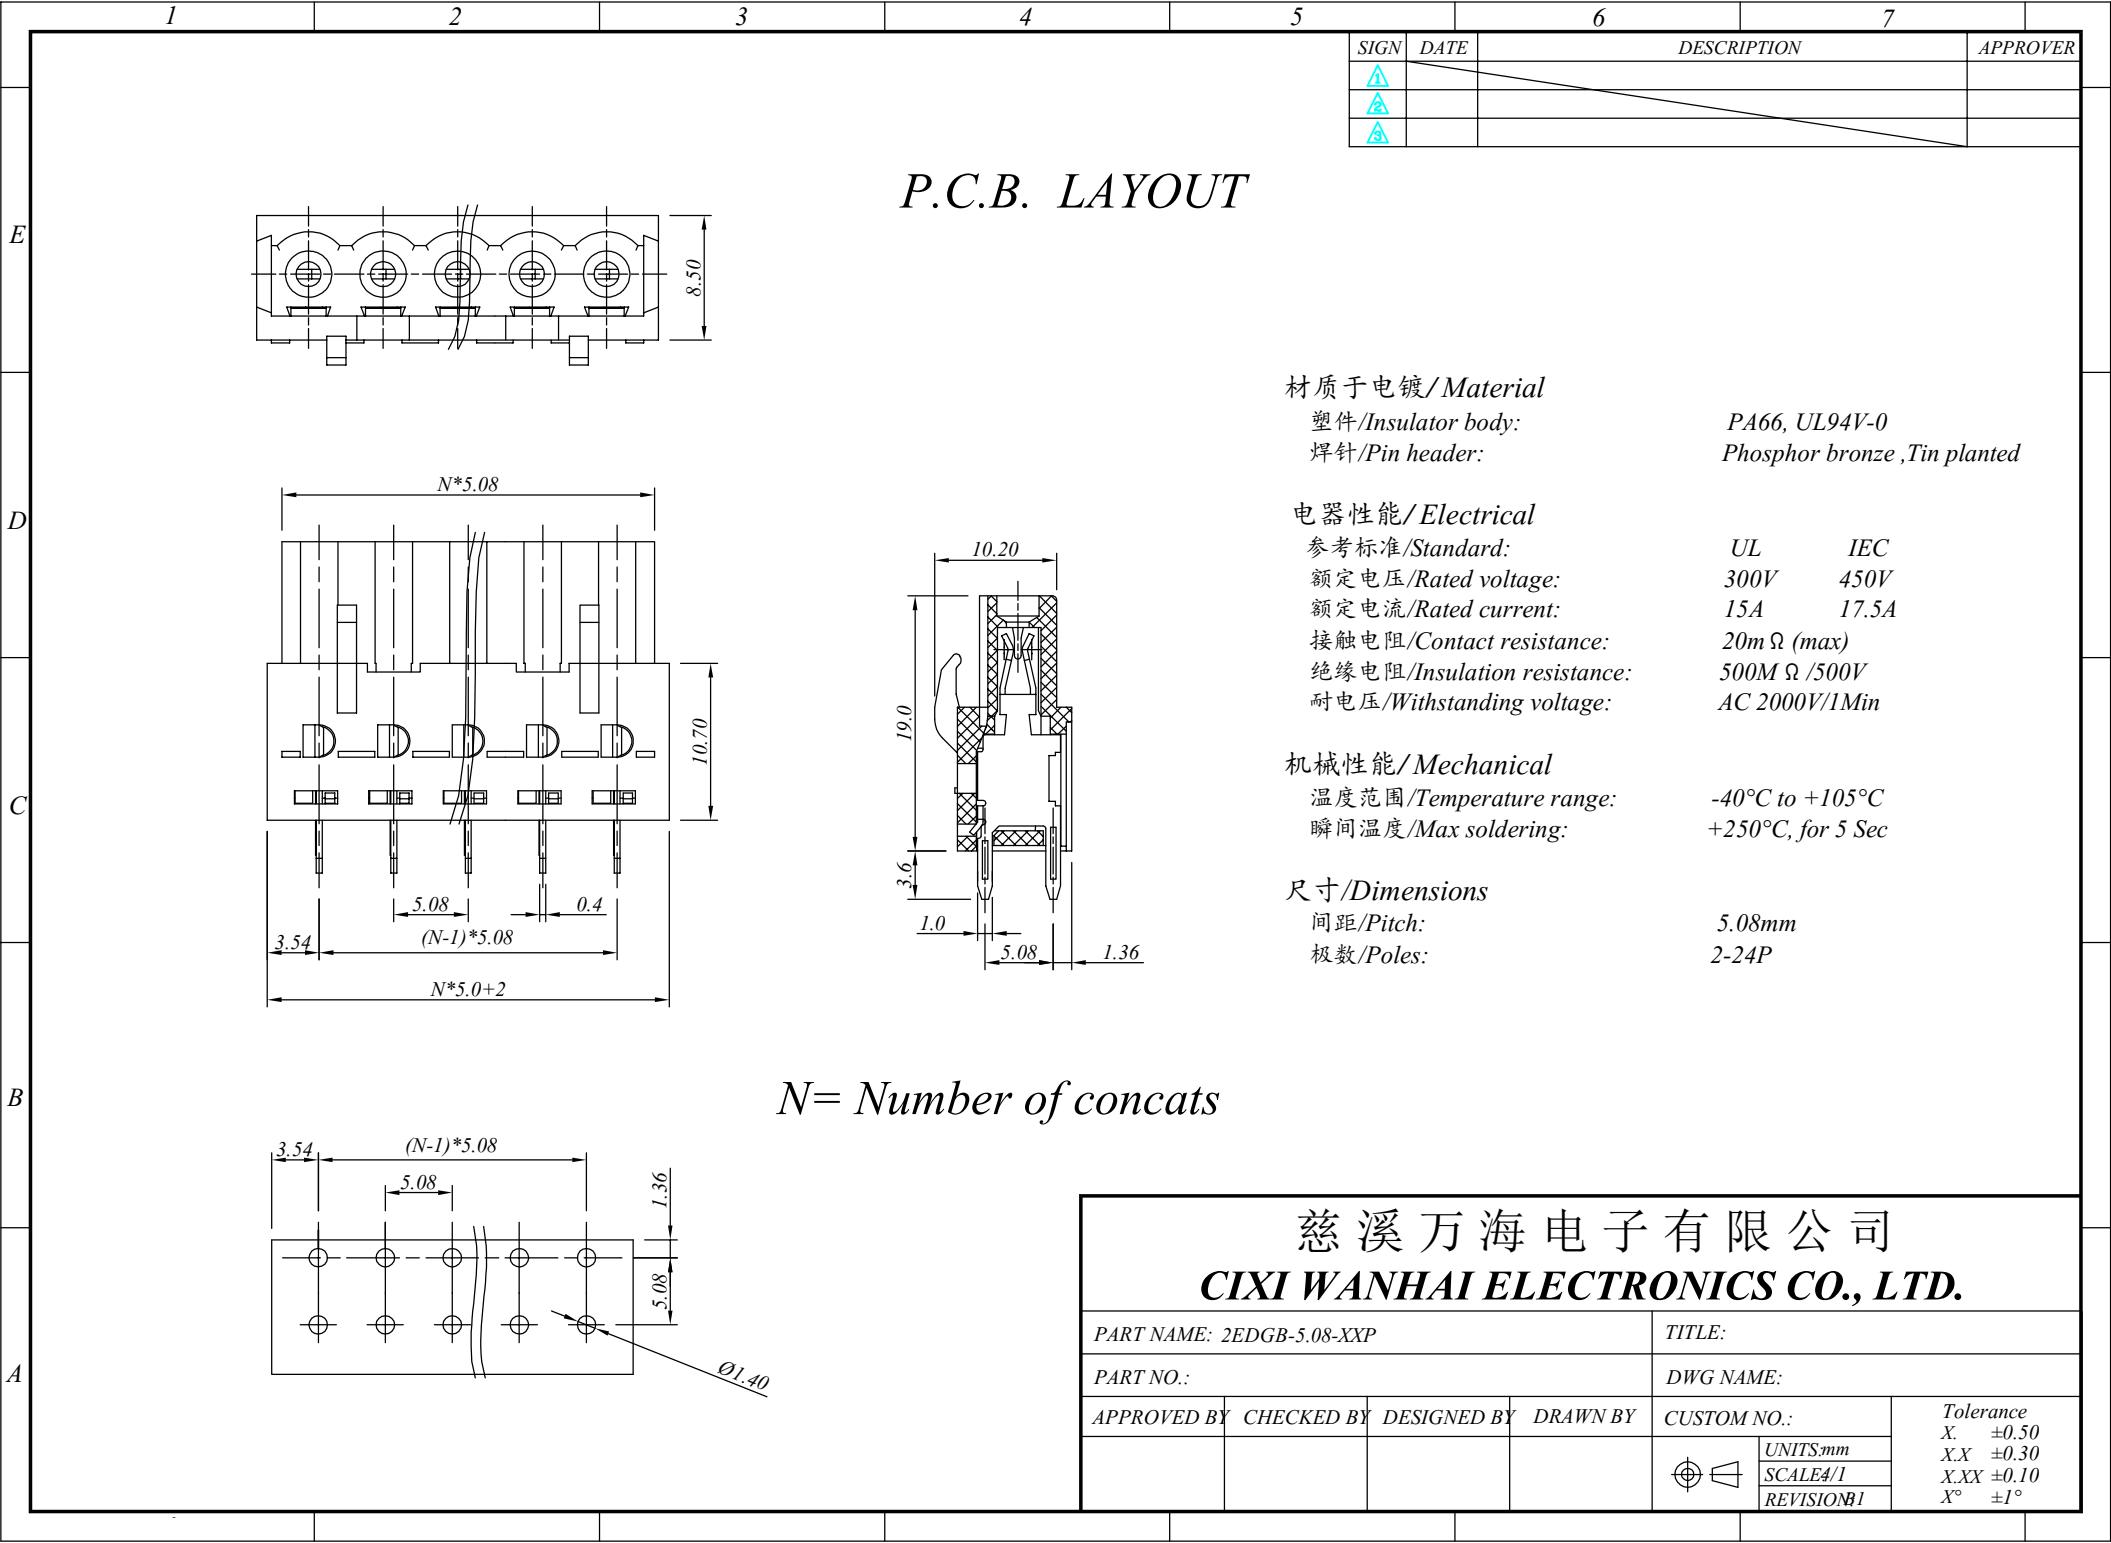

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER

材质于电镀/Material
塑件/Insulator body: PA66, UL94V-0
焊针/Pin header: Phosphor bronze ,Tin planted

电器性能/Electrical
参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 450V
额定电流/Rated current: 15A 17.5A
接触电阻/Contact resistance: 20m Ω (max)
绝缘电阻/Insulation resistance: 500M Ω /500V
耐电压/Withstanding voltage: AC 2000V/1Min

机械性能/Mechanical
温度范围/Temperature range: -40°C to +105°C
瞬间温度/Max soldering: +250°C, for 5 Sec

尺寸/Dimensions
间距/Pitch: 5.08mm
极数/Poles: 2-24P

N= Number of concats

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGB-5.08-XXP				TITLE:	
PART NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
				UNITSmm	
				SCALE4/1	
				REVISION1	