
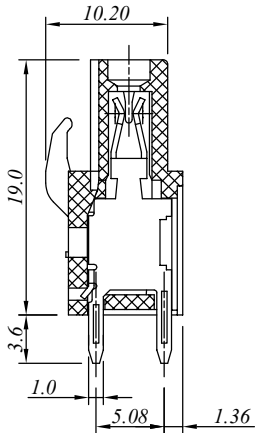
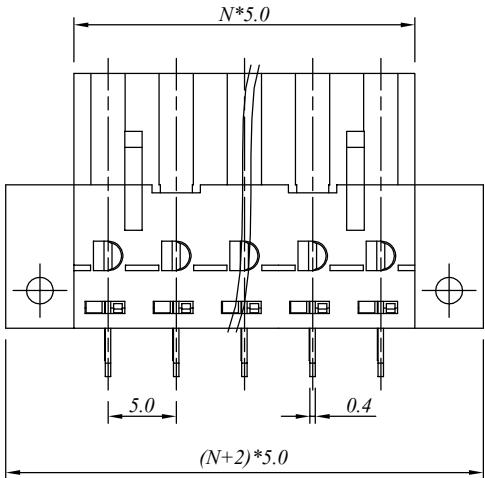


SIGN	DATE	DESCRIPTION	APPROVER

P.C.B. LAYOUT

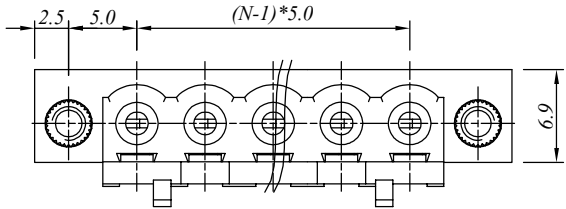

材质于电镀/Material

塑件/Insulator body:
焊针/Pin header:

PA66, UL94V-0
Phosphor bronze ,Tin planted

电器性能/Electrical

参考标准/Standard:

额定电压/Rated voltage:

额定电流/Rated current:

接触电阻/Contact resistance:

绝缘电阻/Insulation resistance:

耐电压/Withstanding voltage:

ULIEC
300V450V
15A17.5A
20mΩ (max)
500MΩ /500V
AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

瞬间温度/Max soldering:

-40℃ to +105℃
+250℃, for 5 Sec


尺寸/Dimensions

间距/Pitch:

极数/Poles:

5.0mm
2-24P

N= Number of concats

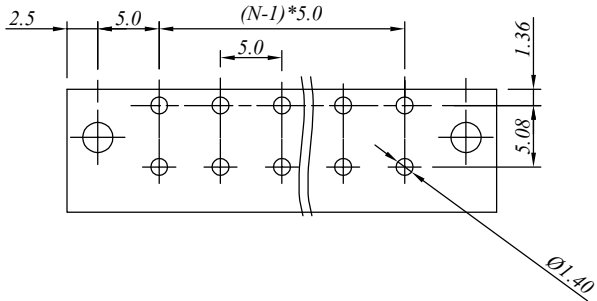

慈溪万海电子有限公司

CIXI WANHAI ELECTRONICS CO., LTD.

PART NAME: 2EDGBM-5.0-XXP				TITLE:	
PART NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance X ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
				UNITSmm	
				SCALE4/1	
				REVISION1	

