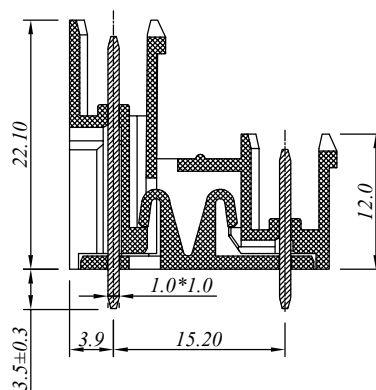
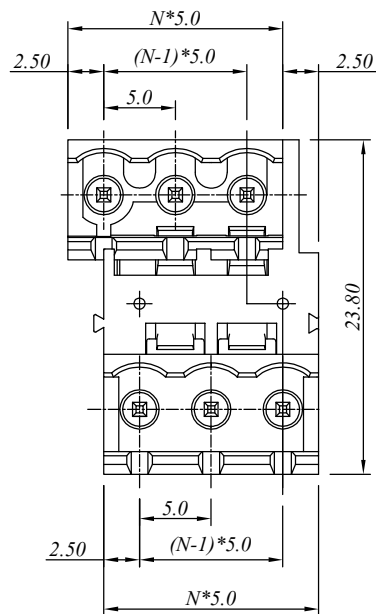


SIGN	DATE	DESCRIPTION	APPROVER
①			
②			
③			

P.C.B. LAYOUT

材质于电镀/*Material*

塑件/*Insulator body*:

PA66, UL94V-0

焊针/*Pin header*:

Brass ,Tin planted

电器性能/*Electrical*

参考标准/Standard:

UL
IEC

额定电压/*Rated voltage*:

300V 320V

额定电流/*Rated current*:

15A 20A

接触电阻/*Contact resistance*:

 $20m \Omega \text{ (max)}$

绝缘电阻/*Insulation resistance*:

500M Ω /500V

耐电压/*Withstanding voltage*:

AC 2000V/1Min

机械性能/*Mechanical*

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions


间距/*Pitch*:

5.0mm

极数/*Poles*:

2-24P

N =Number of contacts

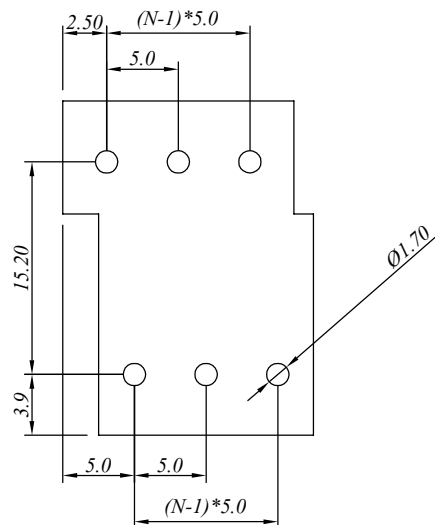

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGVT-5.00-XXP				TITLE:		
PART. NO.:				DWG NAME:		
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance	
					x. ±0.50	
					UNITS: mm	x.x ±0.30
					SCALE: 4/1	x.xx ±0.10
				REVISIONB2	xx° ±1°	

Tolerance

 $x, \pm 0,50$

x .	$\pm 0,30$
x,x	$\pm 0,30$

$$x.xx \quad \pm 0.10$$
$$\chi^{\circ} \quad \pm 1^{\circ}$$

<i>UNITS: mm</i>

SCALE: 4/1

REVISIONB2



