
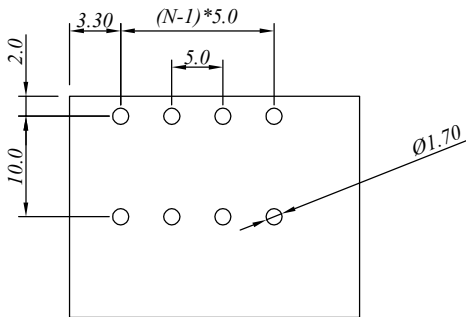
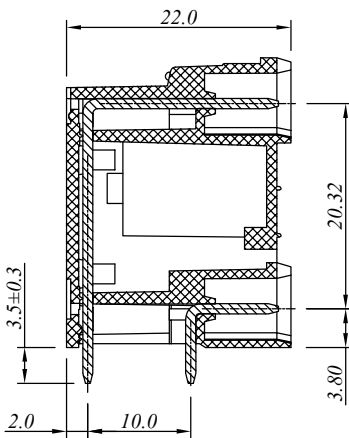


P.C.B. LAYOUT

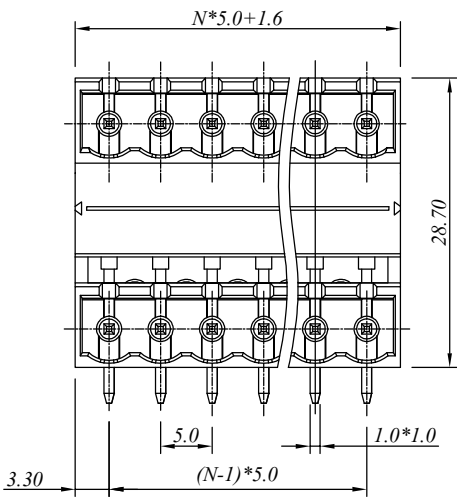


N=Number of contacts

材质于电镀/Material		
塑件/Insulator body:		PA66, UL94V-0
焊针/Pin header:		Brass ,Tin planted
电器性能/Electrical		
参考标准/Standard:	UL	IEC
额定电压/Rated voltage:	300V	320V
额定电流/Rated current:	15A	10A
接触电阻/Contact resistance:	20m Ω (max)	
绝缘电阻/Insulation resistance:	500M Ω /500V	
耐电压/Withstanding voltage:	AC 2000V/1Min	
机械性能/Mechanical		
温度范围/Temperature range:	-40°C to +105°C	
瞬间温度/Max soldering:	+250°C, for 5 Sec	
尺寸/Dimensions		
间距/Pitch:	5.0mm	
极数/Poles:	2-24P	

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGRH-5.00-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					x. ±0.50
					x.x ±0.30
					x.xx ±0.10
				REVISIONB2	xx° ±1°

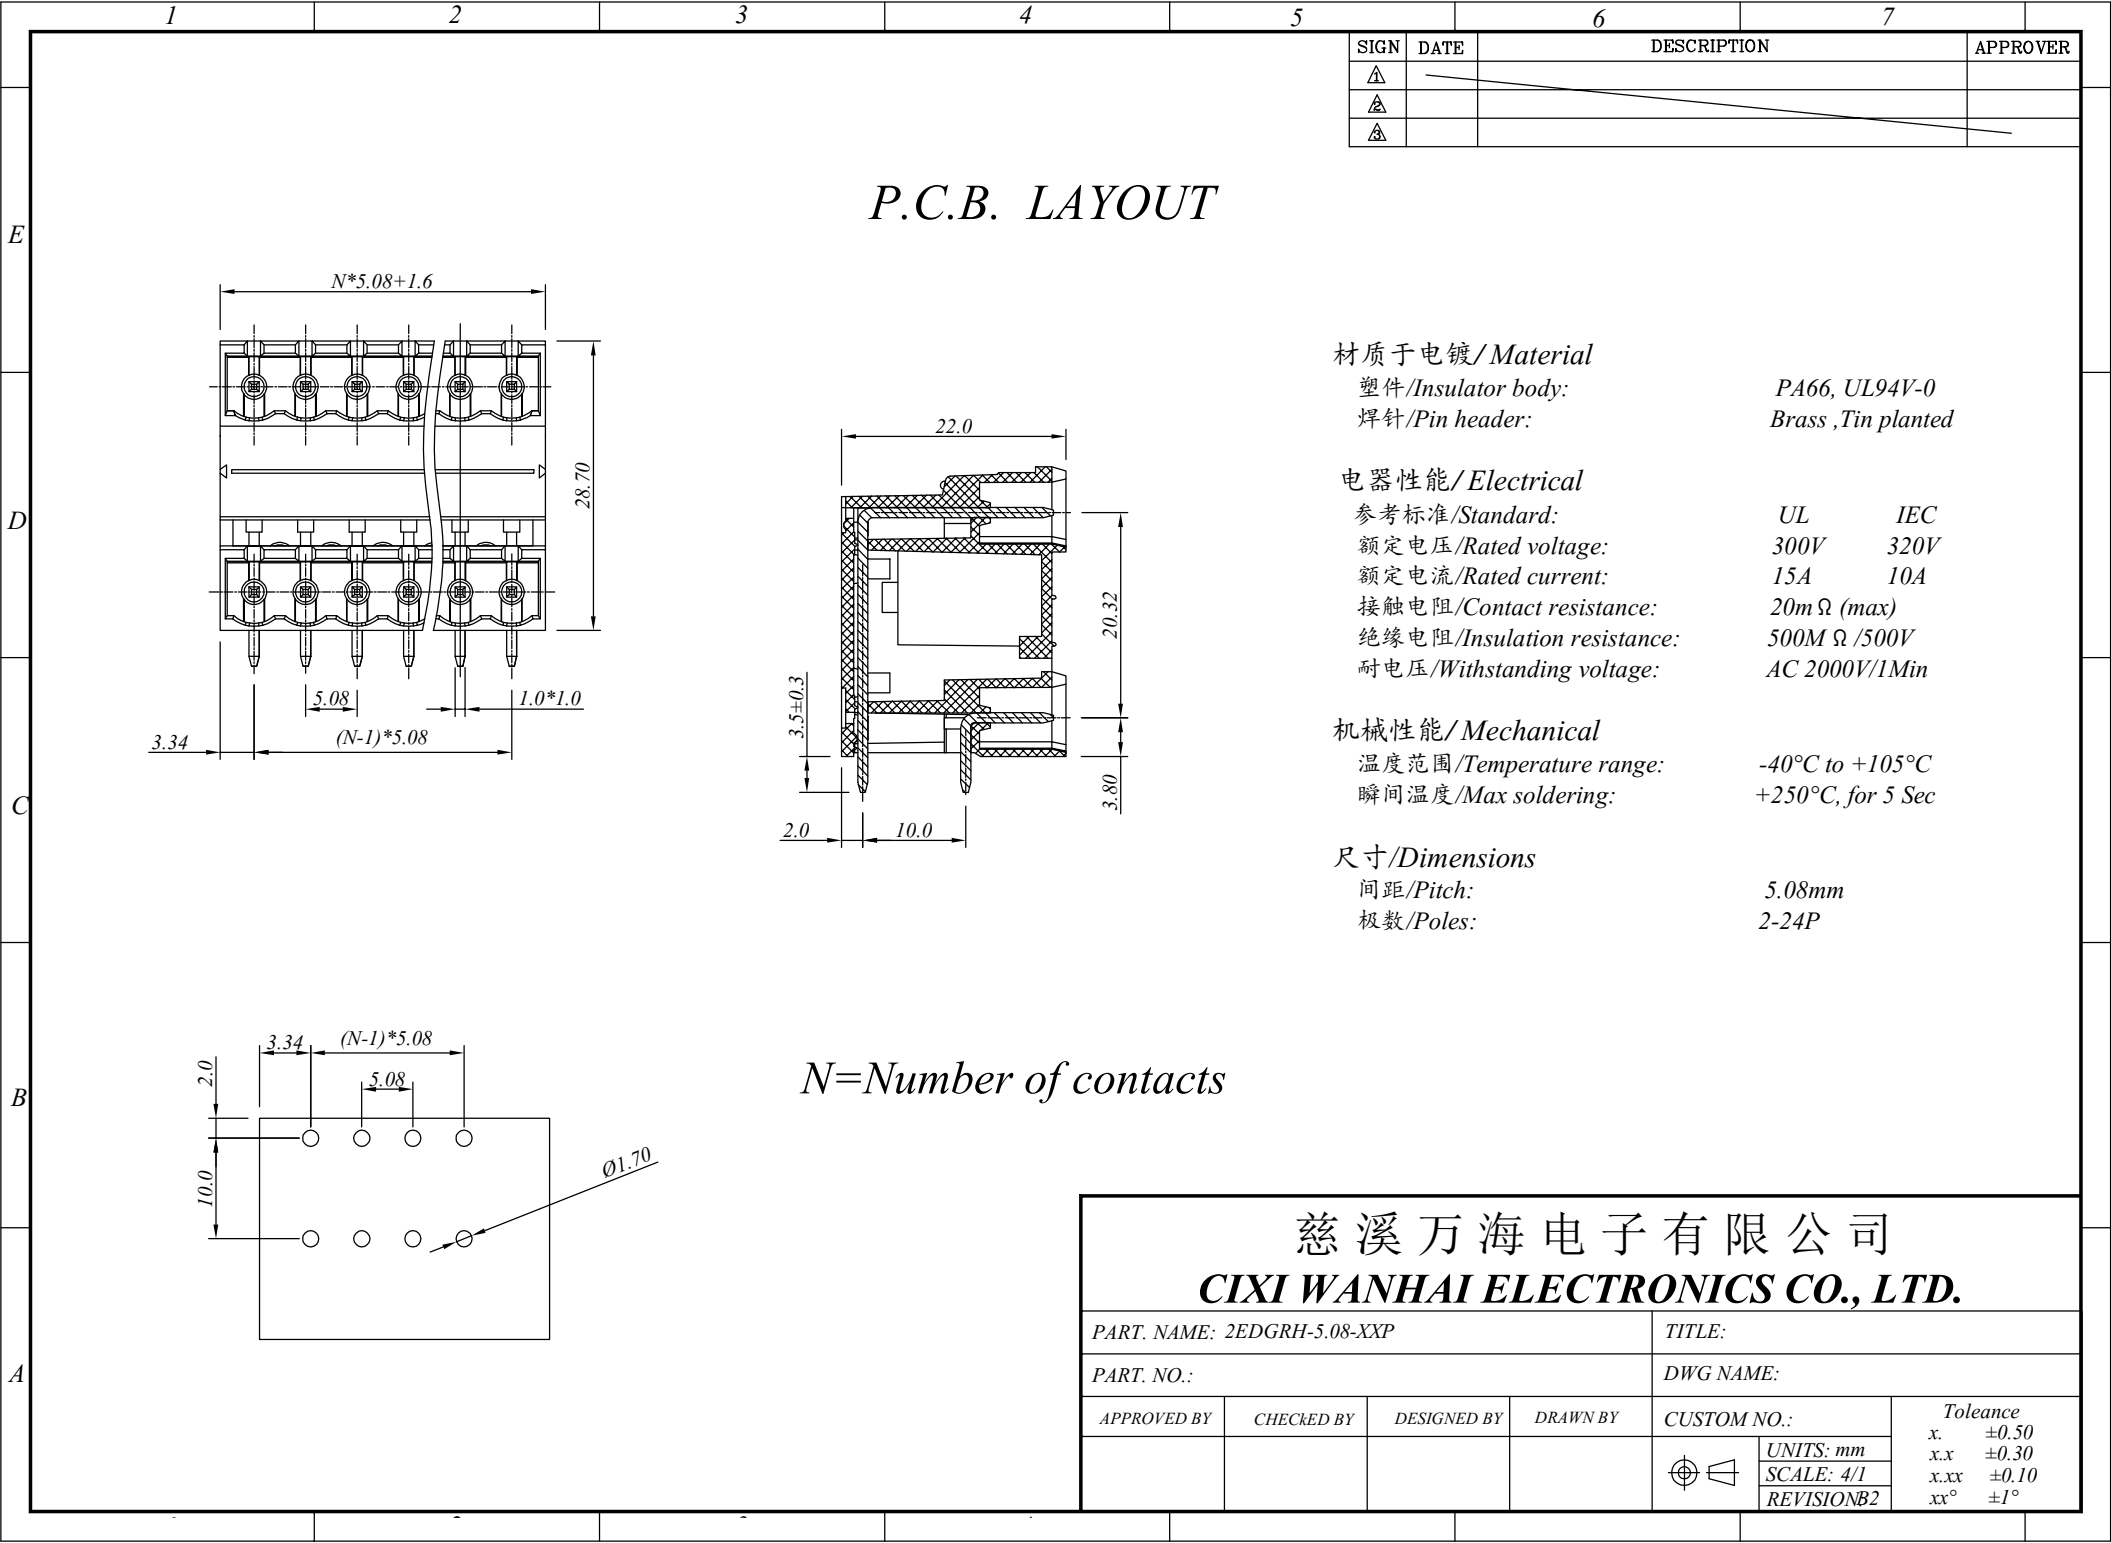

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质于电镀/Material

塑件/Insulator body:

PA66, UL94V-0

焊针/Pin header:

Brass ,Tin planted

电器性能/Electrical

参考标准/Standard:

UL IEC

额定电压/Rated voltage:

300V 320V

额定电流/Rated current:

15A 10A

接触电阻/Contact resistance:

20m Ω (max)

绝缘电阻/Insulation resistance:

500M Ω /500V

耐电压/Withstanding voltage:

AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range:

-40°C to +105°C

瞬间温度/Max soldering:

+250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch:

5.08mm

极数/Poles:

2-24P

N=Number of contacts

慈溪万海电子有限公司

CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGRH-5.08-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					x. ±0.50
					x.x ±0.30
					x.xx ±0.10
				REVISIONB2	xx° ±1°