
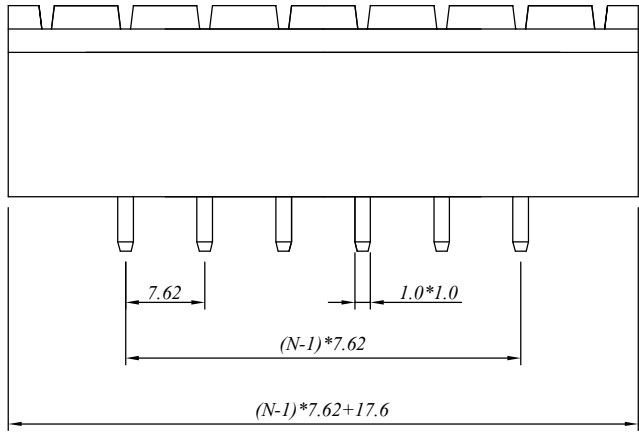
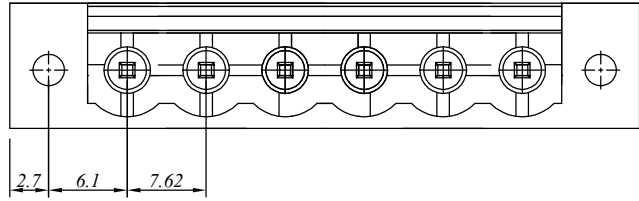


N=Number of contacts

P.C.B. LAYOUT

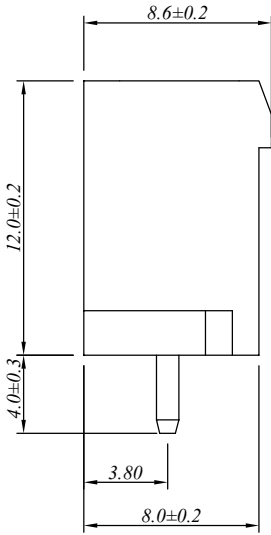

材质于电镀/ Material		
塑件/Insulator body:	PA66, UL94V-0	
焊针/Pin header:	Brass ,Tin planted	
电器性能/ Electrical		
参考标准/Standard:	UL	IEC
额定电压/Rated voltage:	300V	450V
额定电流/Rated current:	15A	20A
接触电阻/Contact resistance:	20m Ω (max)	
绝缘电阻/Insulation resistance:	500M Ω /500V	
耐电压/Withstanding voltage:	AC 2000V/1Min	
机械性能/ Mechanical		
温度范围/Temperature range:	-40°C to +105°C	
瞬间温度/Max soldering:	+250°C, for 5 Sec	
尺寸/Dimensions		
间距/Pitch:	7.62mm	
极数/Poles:	2-24P	

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGVM-7.62-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance
					x. ±0.50
					x.x ±0.30
					x.xx ±0.10
					xx° ±1°