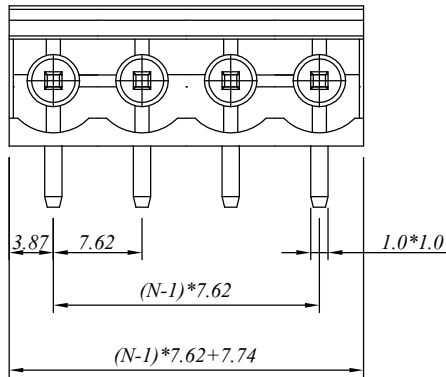
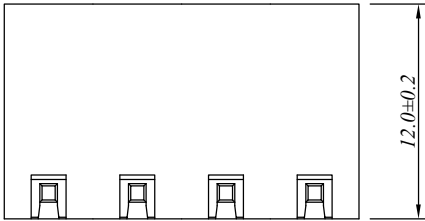


P.C.B. LAYOUT

材质于电镀/Material

塑件/Insulator body: PA66, UL94V-0
焊针/Pin header: Brass ,Tin planted

电器性能/Electrical

参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 450V
额定电流/Rated current: 15A 20A
接触电阻/Contact resistance: 20m Ω (max)
绝缘电阻/Insulation resistance: 500M Ω /500V
耐电压/Withstanding voltage: AC 2000V/1Min

机械性能/Mechanical

温度范围/Temperature range: -40°C to +105°C
瞬间温度/Max soldering: +250°C, for 5 Sec

尺寸/Dimensions

间距/Pitch: 7.62mm
极数/Poles: 2-24P

N=Number of contacts

慈溪万海电子有限公司
CIXI WANHAI ELECTRONICS CO., LTD.

PART. NAME: 2EDGRC-7.62-XXP				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Tolerance x. ±0.50 x.x ±0.30 x.xx ±0.10 xx° ±1°
				UNITS: mm	
				SCALE: 4/1	
				REVISIONB2	