

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

材质 于电镀 / Material
塑件 /Insulator body:
夹子 /Clamp:



PA66, UL94V-0
Copper alloy, Sn plated

电器性能/ Electrical
参考标准 /Standard:
额定电压 /Rated voltage:
额定电流 /Rated current:
接触电阻 /Contact resistance:
绝缘电阻 /Insulation resistance:
耐电压 /Withstanding voltage:

UL IEC
300V 400V
1.5A 13.5A
20m Ω (max)
500M Ω /500V
AC 2000V/1Min

机械性能/ Mechanical
温度范围 /Temperature range:
瞬间温度 /Max soldering:
尺寸 /Dimensions
间距 /Pitch:
极数 /Poles:

-40°C to +120°C
+250°C, for 5 Sec
7.62mm
2-24P

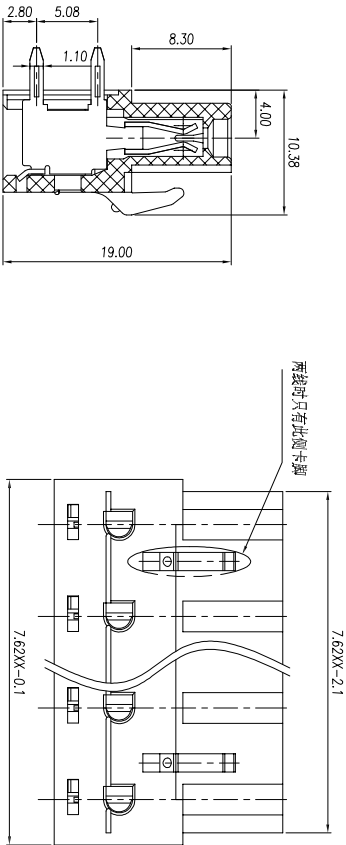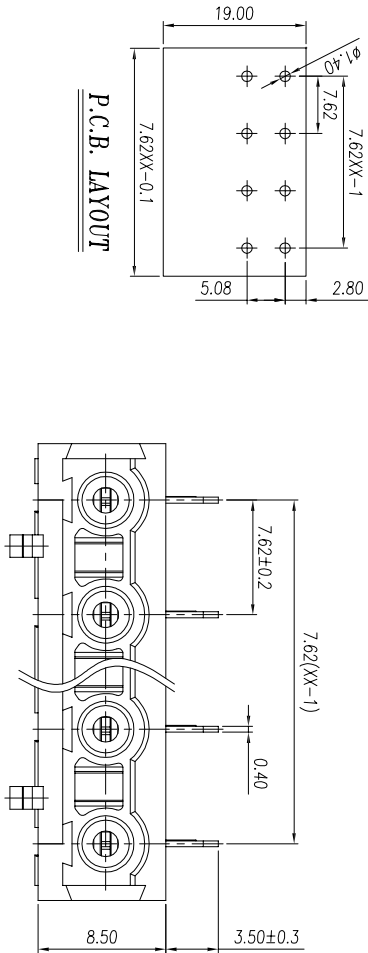

N=Number of contacts

慈溪万海电子有限公司 CIXI WANHAI ELECTRONICS CO., LTD.			
PART NAME: 2EDG4-7.62-XXP		TITLE:	
PART NO.:		DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
CUSTOM NO.:		Tolerance	
		X. ±0.50	
		X.X ±0.30	
		X.XX ±0.10	
		X° ±1°	